



# LUBRICANT TANKS


## SPECIFICATIONS

LUBRICANT TANKS	6, 12, or 65 Gallon - 10 Gauge
PUMP MOTOR	TEFC 1/3HP
LUBRICANT LEVEL	Electronic Sensor with PVC Sight Gages (DL-806)
PUMP	Gear 1/2 GPM Factory Tested 0-250 PSI
FILTRATION	145 Micron
OIL VISCOSITY	Up to 25 SAE Oil
POWER SOURCE	120VAC, 10 AMPS <b>DL-9000 PS:</b> 120VAC or 24VDC
DIMENSIONS	<b>DL-806:</b> 18 1/2"H x 12 1/2"W x 15"L <b>DL-812:</b> 22 1/2"H x 12 1/2"W x 15"L <b>DL-865:</b> 49"H x 22 1/2"W x 22 1/2"L
EQUIPMENT EXTERIOR	Powder Coated Burgundy For Long-Term Durability

Digilube Systems, Inc. Offers Three Sizes of Lubricant Tanks: 6 Gallon, 12 Gallon, and 65 Gallon.

Each Tank is Designed to provide Lubricant to both Single and Multiple Conveyors.

*Note: Tanks are Available Without Power Supply. DL-5003 Microprocessor can be Mounted on all Lubricant Tanks.*

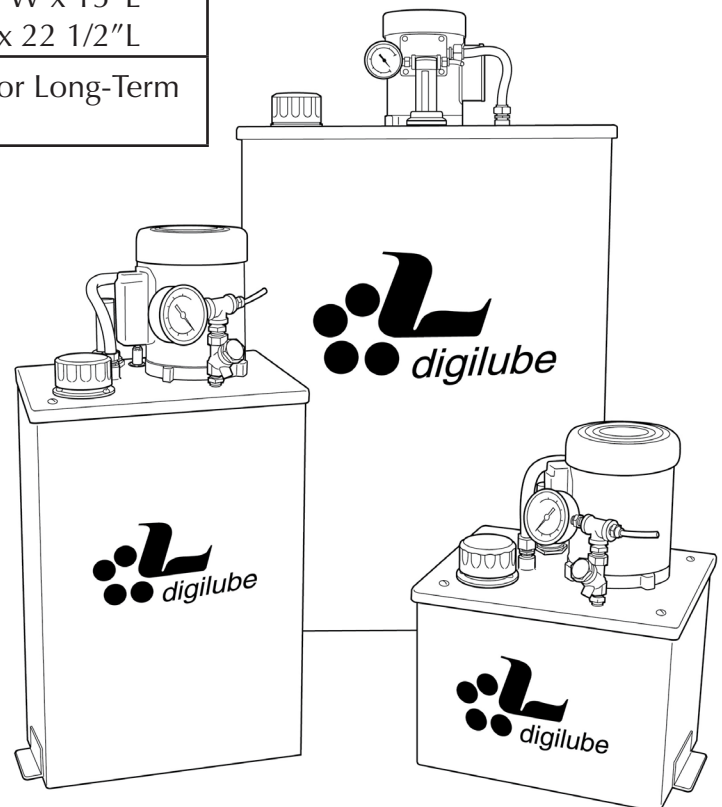

SPRINGBORO, OH  
OFFICE: (800) 837-5667  
FAX: (937)748-0597  
WWW.DIGILUBE.COM