

# THE AIRID SERIES

by digilube

The optimal solution for any facility; connect shop air into the elbow fitting on the inlet side of the system and out the regulator. It's that simple. Ultra Systems come fully assembled to provide for absolute ease of installation.

The Ultra incorporates industry leading Tsunami drying technology. Each system includes a water separator, oil coalescing filter and Moisture Minder® automatic piston drains to assure proper draining of water, oil and other contaminants. A built in bypass valve allows the dryer to be shutoff for maintenance or service without stopping production. The entire system is mounted on a 80 gallon receiver tank to provide additional storage of ultra clean, dry air.

## ULTRA DRYING SYSTEM


### FEATURES & BENEFITS

- 3 Year Warranty
- Low Relative Humidity - Down to .01% RH
- Low Dew Points - Down to -80°F
- Easy, Low Maintenance - Under \$100/year average
- Easy to use Outlet Regulator
- 80 Gallon Storage Tank Increases Shop Capacity
- Waterborne & Solvent Ready!

SIZE	MAX RATINGS			PORT SIZE	PART NUMBER
	FLOW	PRESSURE	TEMP.		
10Hp	40 SCFM	175 PSI	150°F	1"	J-0810
15Hp	60 SCFM	175 PSI	150°F	1"	J-0815
20Hp	80 SCFM	175 PSI	150°F	1"	J-0820
30Hp	120 SCFM	175 PSI	150°F	1"	J-0830

### PRODUCT KEY

- 1 Regenerative Air Dryer
- 2 Pre-Filtration
  - 1st Stage Water Separator
  - 2nd Stage Oil Coalescing Filter
- 3 Automatic Piston Drains
- 4 PLC Control
- 5 80 Gal. Receiver Tank
- 6 High Flow Piston Outlet Regulator

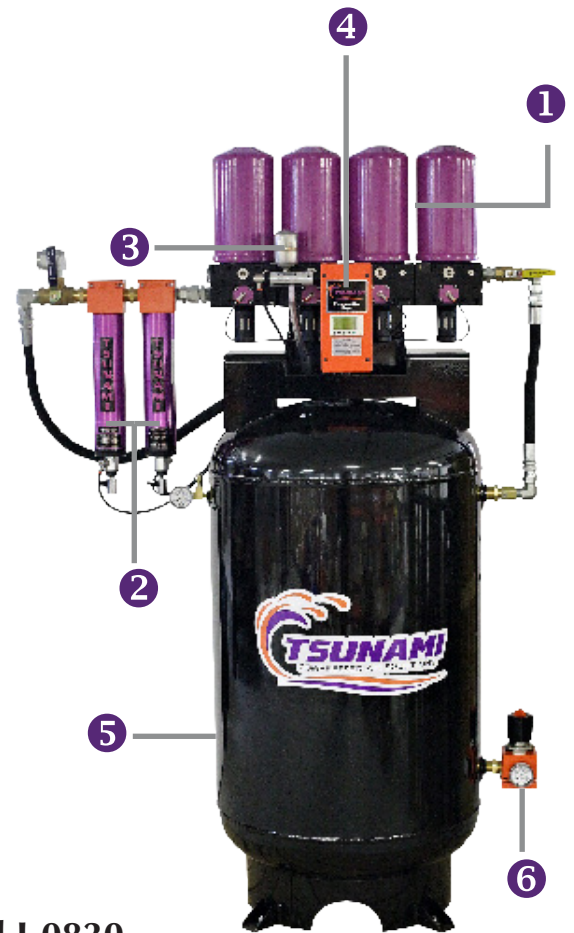

Model J-0830 (pictured)



[www.digilube.com](http://www.digilube.com)

216 East Mill St. Springboro, OH 45066 • (Office) 937-748-2209 • (Fax) 937-748-0597