



DL-122

ENCLOSED POWER CHAIN LUBRICATOR


FEATURES

- Microprocessor controlled
- Millisecond dispensing accuracy
- Field programmable security code
- Exclusive self-diagnostic feature available
- Large 2-line LCD screen
- Tracks lube usage per cycle
- Displays approximate line speed
- 16 button programmable key pad
- 4 independent channels
- Tracks lube usage per cycle
- Sturdy dispensing tubes resist vibration
- PC interface contacts (optional PLC contacts)
- Automatic fault shut-down
- All electronic
- 1 year warranty
- 3 year microprocessor warranty

Equipment Compatible With All Conveyor Manufacturers Including: Richard Wilcox, Unibelt, Gregory Adams & Allied.

SPECIFICATIONS

POWER SOURCE	120VAC OR 24VDC
DIMENSIONS	28" L x 17" H x 6" W
LUBRICANT POINTS	Vertical load wheel bearings Horizontal guide roller bearings Connecting knuckle pivot points 4 wheel attachments
OPTIONAL LUBE POINTS AVAILABLE	
AVAILABLE FOR STEEL OR PLASTIC TREAD CHAINS	

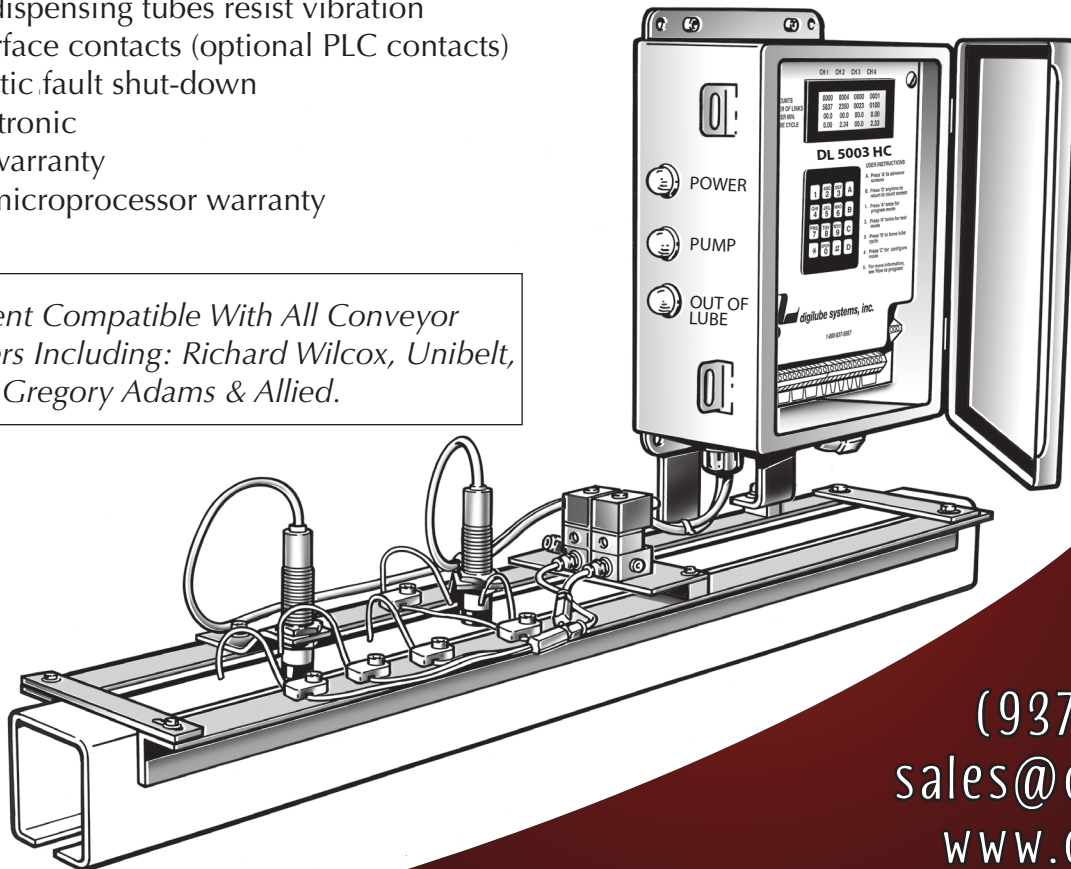

(937) 748-2209
sales@digilube.com
www.digilube.com