




digilube systems

12 GALLON LUBRICANT TANK

SPECIFICATIONS

MOUNT	POSITIONED WAIST HIGH ON COLUMN FOR EASY FILLING
PUMP MOTOR	TEFC 1/3HP
LUBRICANT LEVEL	ELECTRONIC SENSOR WITH PVC SIGHT GAGES
PUMP	GEAR 1/2 GPM FACTORY TESTED 0-250 PSI
FILTRATION	145 MICRON
OIL VISCOSITY	UP TO 25 SAE OIL
POWER SOURCE	COMES WITH OR WITHOUT DL-9000 POWER SUPPLY
DIMENSIONS	22 1/2"H X 12 1/2"W X 15"L WT 75#
EQUIPMENT EXTERIOR	POWDER COATED BURGUNDY FOR LONG-TERM DURABILITY

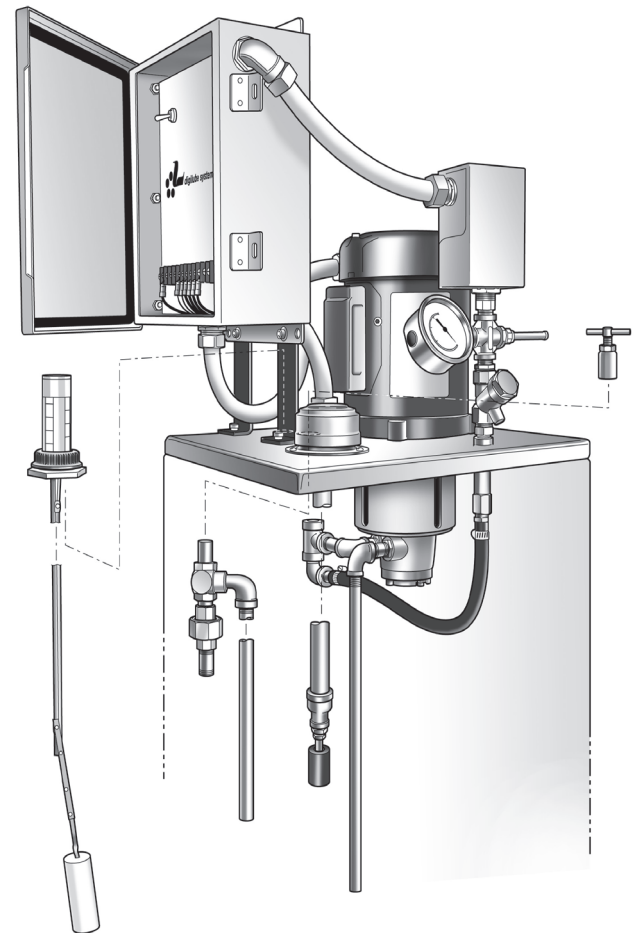

The DL-812 is designed to provide lubricant to both single and multiple conveyors. It is available without a Power Supply. (Pictured with PS)

The DL-5003 Microprocessor can be Mounted on all Lubricant Tanks.