




LUBRICANT TANKS

SPECIFICATIONS

LUBRICANT TANKS	12 OR 65 GALLON - 10 GAUGE
PUMP MOTOR	TEFC 1/3HP
LUBRICANT LEVEL	ELECTRONIC SENSOR WITH PVC SIGHT GAUGES
PUMP	GEAR 1/2 GPM FACTORY TESTED 0-250 PSI
FILTRATION	145 MICRON
OIL VISCOSITY	UP TO 25 SAE OIL
POWER SOURCE	120VAC, 8 AMPS DL-9000 PS: 120VAC OR 24VDC
DIMENSIONS	DL-812: 22 1/2"H X 12 1/2"W X 15"L DL-865: 49"H X 22 1/2"W X 22 1/2"L
EQUIPMENT EXTERIOR	POWDER COATED BURGUNDY FOR LONG-TERM DURABILITY

Digilube Systems offers Two Sizes of Lubricant Tanks: 12 Gallon and 65 Gallon.

Each Tank is Designed to provide Lubricant to both Single and Multiple Conveyors.

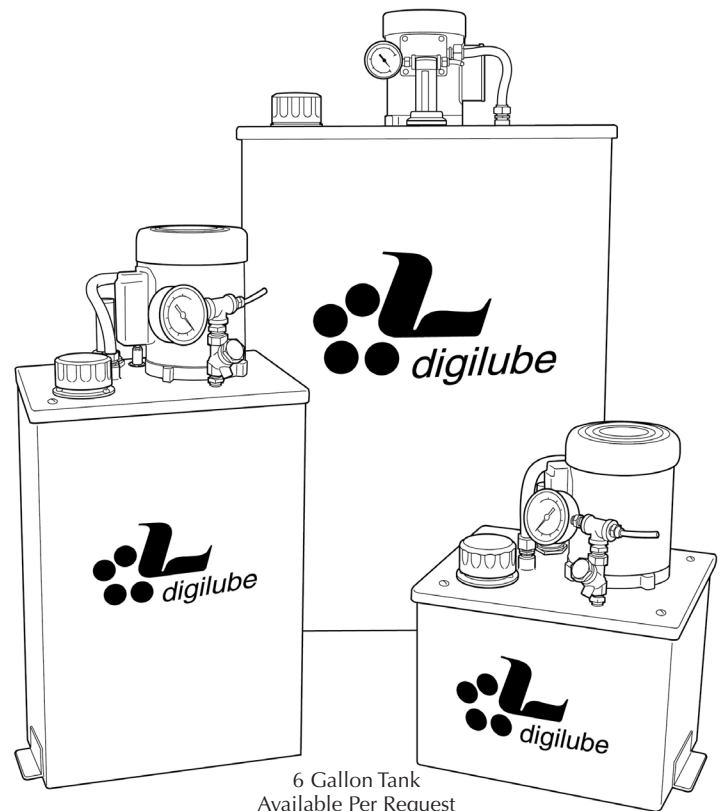

Note: Tanks are Available Without Power Supply.

DL-5003 Microprocessor can be Mounted on all Lubricant Tanks.