




FREE CARRIER LUBRICATOR

FEATURES

- Microprocessor Controlled
- Millisecond Dispensing Accuracy
- Field Programmable Security Code
- Exclusive Self-Diagnostic Feature Available
- Large 2-Line LCD Screen
- 4 Independent Channels
- Tracks Lube Usage Per Cycle
- Displays Approximate Line Speed
- 16 Button Programmable Key Pad
- Sturdy Dispensing Tubes Resist Vibration
- PC Interface Contacts (Optional PLC Contacts)
- Automatic Fault Shut-Down
- All Electronic
- 1 Year Warranty
- 3 Year Microprocessor Warranty

DL-121FC

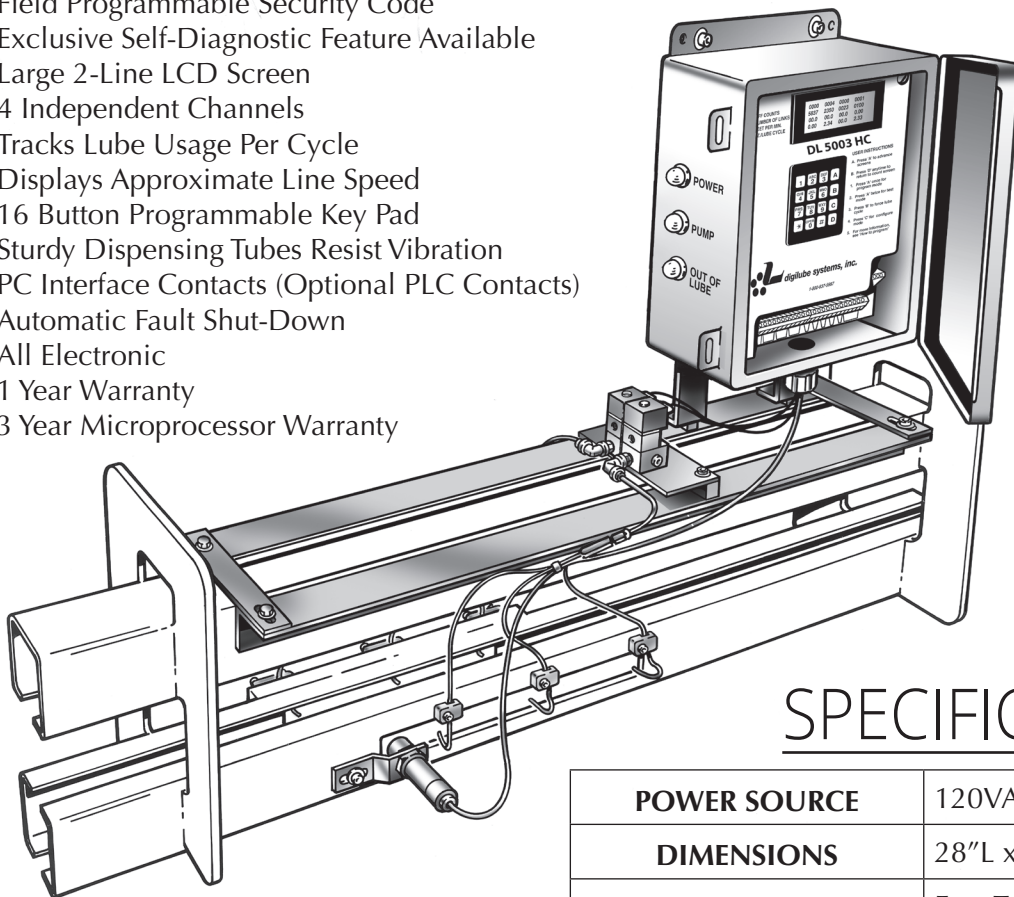

*Equipment
Compatible With
All Conveyor
Manufacturers
Including: Richard
Wilcox, Unibilt,
Gregory Adams &
Allied*

SPECIFICATIONS

POWER SOURCE	120VAC OR 24VDC
DIMENSIONS	28"L x 17"H x 6"W
LUBRICANT POINTS	Free Trolley Open Load Wheel Bearings Horizontal Guide Roller Bearings
OPTIONAL LUBE POINTS AVAILABLE	
AVAILABLE FOR STEEL OR PLASTIC TREAD CHAINS	