


POULTRY PROCESSING APPLICATIONS

FEATURES

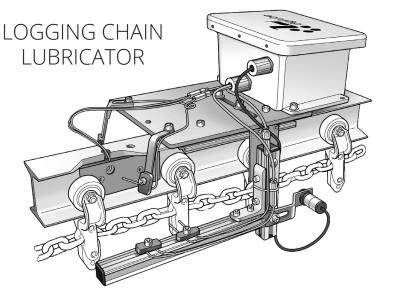

- DI-5003 Controller With Menu Driven
 Programming; Continuous Display Readout
- ° Microprocessor Controlled
- ° Lubricator Status Indicator Lights
- Processor Incorporates Memory Backup and Automatic Restart
- ° Sturdy Dispensing Tubes Resist Vibration
- ° Optional PLC Interface Contacts
- Pre-Mounted on 24" Section of Stainless, Galvanized and Round Track Applications
- Designed to Withstand Wet Environments
- Stainless Steel Aluminum Design
- ^o 3 Year Warranty

These Systems are Designed


- ° Factory Backed Warranty
- ° Factory Trained Field Service Available
- ° Service Contracts Available
- ° Emergency Service Available
- Training and Preventive Maintenance Seminars Available



SERVICI

Digilube Offers Three Sizes of Lubricant Tanks: 6, 12 & 65 Gallon

Each Tank is Designed to Provide Lubricant to Both Single and Multiple Conveyors

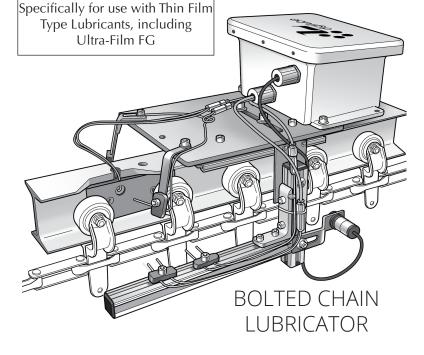

www.digilube.com